




# SFlow 500

## SURFACE PUMP

### MEDIUM LIFT / LONG DISTANCE

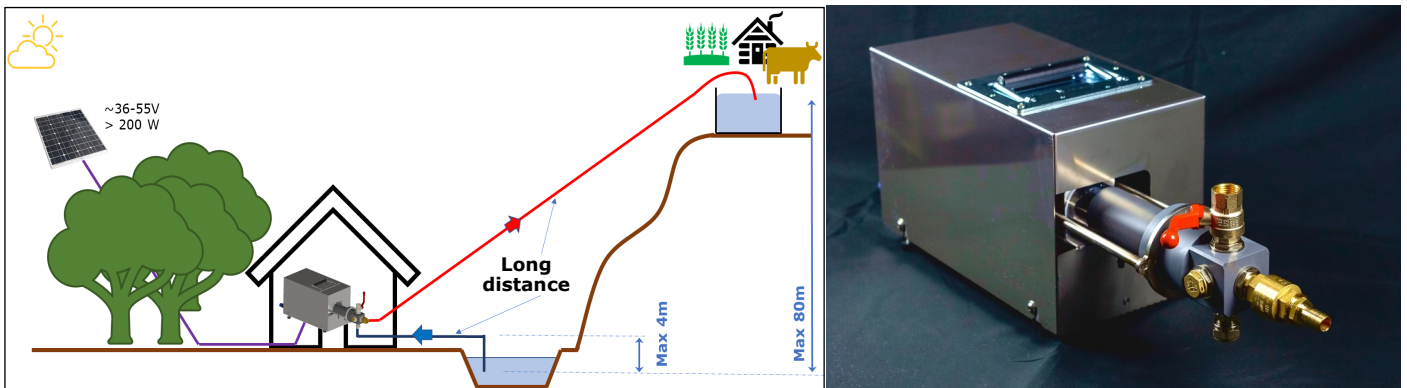

The **SFlow 500** works on the same principle as the SFlow 200, with the same characteristics, but differs in its performance.

It is particularly adapted to elevation up to 80 meters with a much higher flow rate.

It is ideal for drip irrigation of vegetable gardens, watering livestock, filling swimming pools or retention basins on small and medium-sized farms.



Irrigation



Drop to drop




Medium lift



Long distance



Filtration



Livestock watering




Small communities


# SFlow 500

Dimensions : **550x230x185 mm**  
 Weight : **12 kg**  
 Input voltage : **~36-50V DC**  
 Max. current : **5 A**  
 Max. flow rate : **500 l/h**  
 Max. suction lift : **4 m**  
 Max. vertical lift : **80 m**

## Production curve

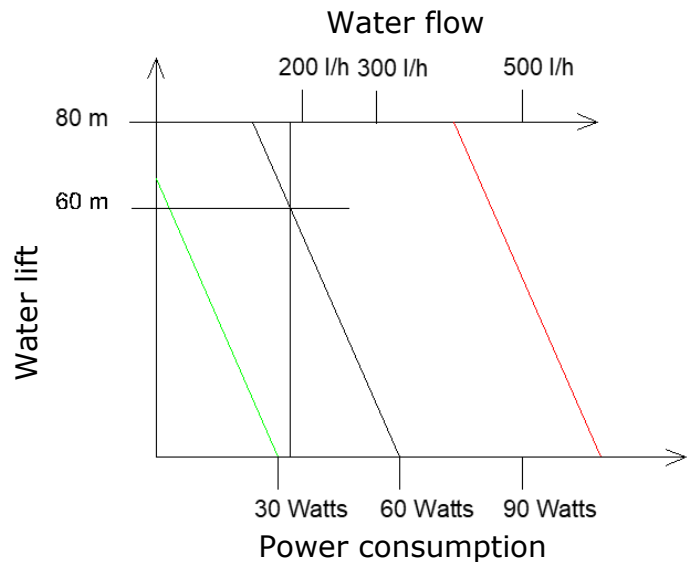

## HYDRAULIC CONNECTIONS :

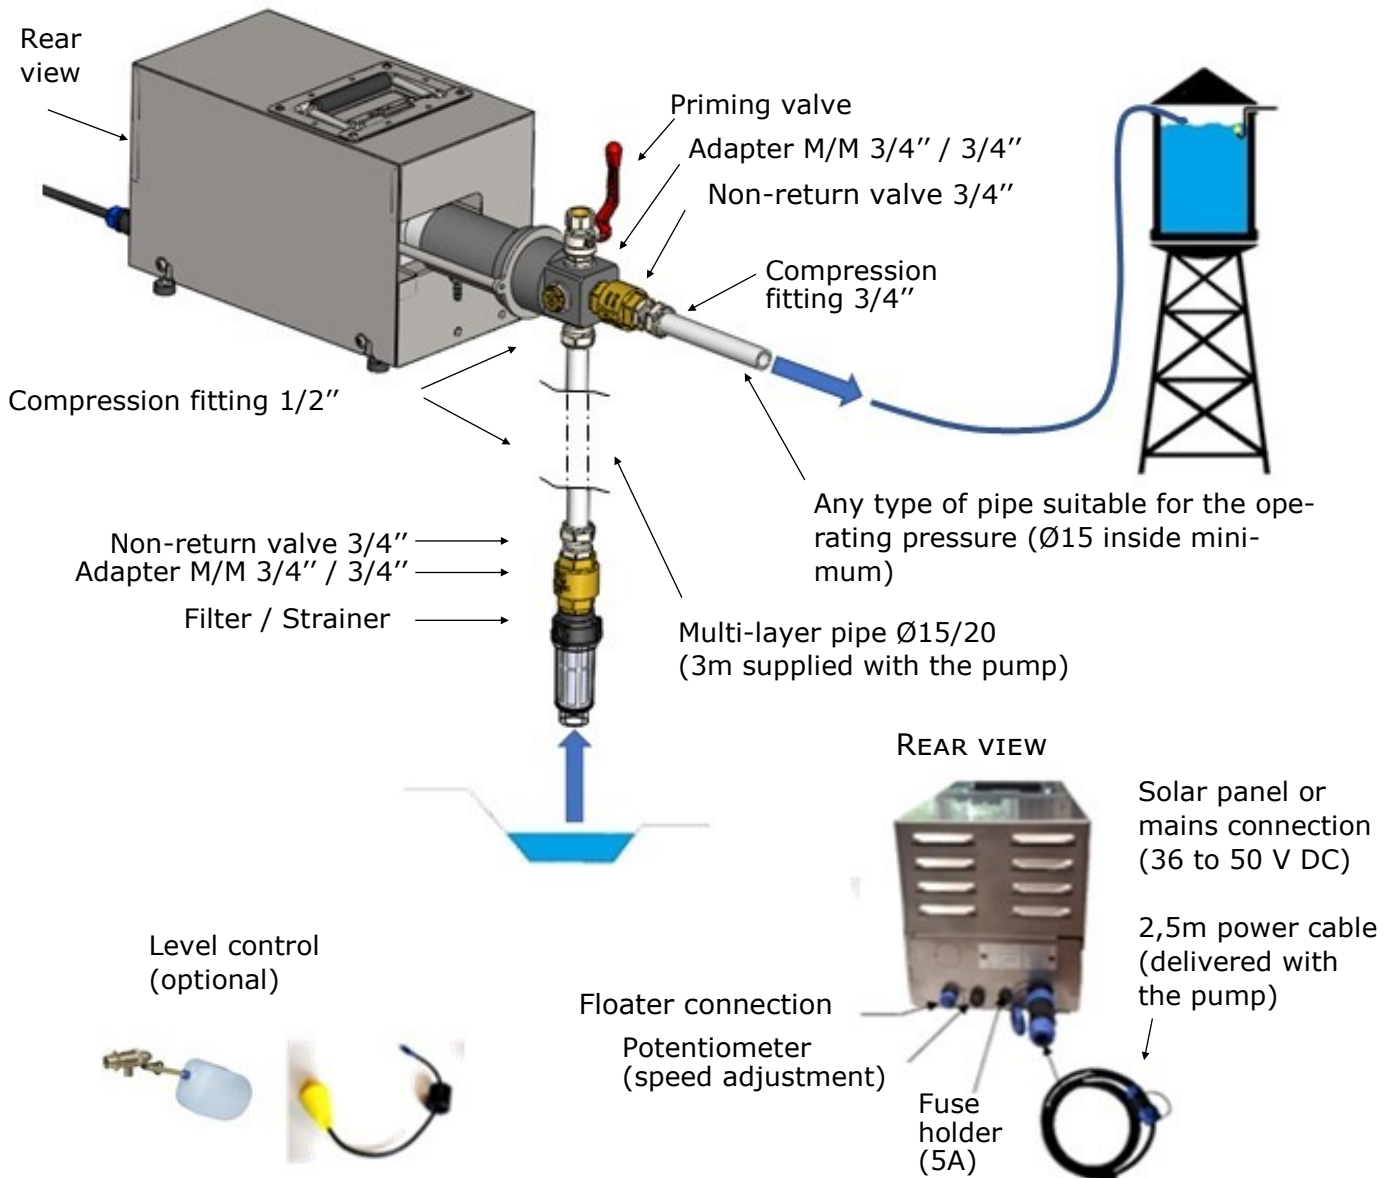

Swiss Intech SA  
[info@swissintech.ch](mailto:info@swissintech.ch)  
 Route des Rez 1  
 CH-1667 Enney



[pumpilo.com](http://pumpilo.com)  
 Made in Switzerland by

